




OX Engineered Products
22260 Haggerty Road Suite 365
Northville, MI 48167
p. 1.800.345.8881
f. 248.289.9955
oxep.com

arcticFLASH[®]

synthetic flashing by **OX**

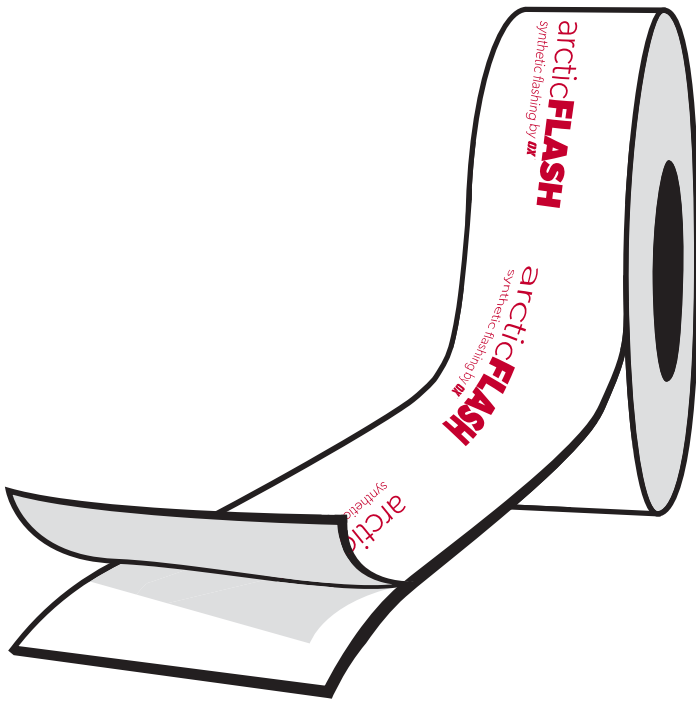

Arctic-Flash[®] is a high tack, high performance self-adhered window and door flashing tape designed with a wide application temperature range from 0°F to extreme heat without requiring primer or mechanical fasteners. Available in 4", 6" and 9" x75' rolls.

Uses

Ideal for flashing windows and door openings

Installation

Peel-n-stick backer for easy installation

Applications

Can be applied in temps as low as 0°F


Ease of Use

Self seals around fasteners

Attributes

- Peel-n-stick—easy installation
- Application temperature 0°F – 180°F
- 6 month UV exposure
- High tack –no primer necessary
- Excellent air & moisture barrier properties
- Compatible with sealants & caulking
- Self-seals around properly installed fasteners
- No VOCs, HFCCs, or CFCs
- 15 Year Limited Warranty
- Made in the USA

Installation

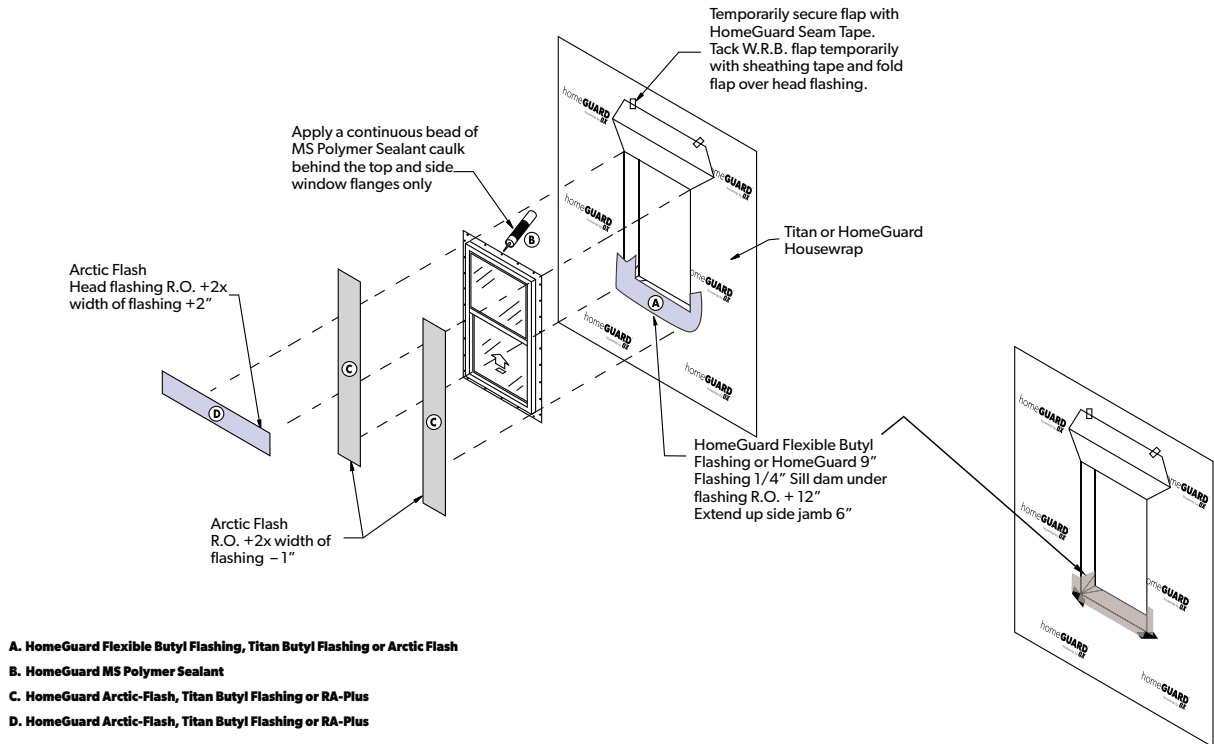

Technical Data for Arctic Flash® Synthetic Flashing

Properties	Test Method	Test Results
Facer Material Composition		White, High Molecular Weight Film
UV Exposure Rating	Testing After Aging	6 months
Cold Temperature Flexibility	ASTM C772-74	Pass
Self-Seal	ASTM D 1970 Section 7.9	Pass
Sealant Compatibility	AAMA 713-08	Pass
Plasticizer Migration	ASTM C772-74	No Bleed or Contact Stain
Moisture Vapor Permeability	ASTM E96	<1 perm
Certifications	AAMA 711-07	Meets or exceeds requirements