



OX Engineered Products  
22260 Haggerty Road Suite 365  
Northville, MI 48167  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com



TITAN<sup>®</sup> Butyl Flashing is a high tack, high performance self-adhered window and door flashing tape designed with a wide application temperature range from 20° F to extreme heat of 180° F without requiring primer or mechanical fasteners. Available in 4", 6", 9" and 12" x 75' rolls.

---

### Uses

Ideal for flashing windows and door openings

### Installation

Peel-n-stick backer for easy installation

### Applications

Can be applied in temps as low as 20° F.


### Ease of Use

Self seals around fasteners

## Attributes

- Peel-n-stick – Easy installation
- Application temperature 20° F – 180° F
- 6 month UV exposure
- High tack – no primer necessary
- Excellent air & moisture barrier properties
- Compatible with sealants and caulking
- Self-seals around properly installed fasteners
- No VOCs, HFCCs, or CFCs
- 15 year limited warranty
- Made in the USA

## Installation

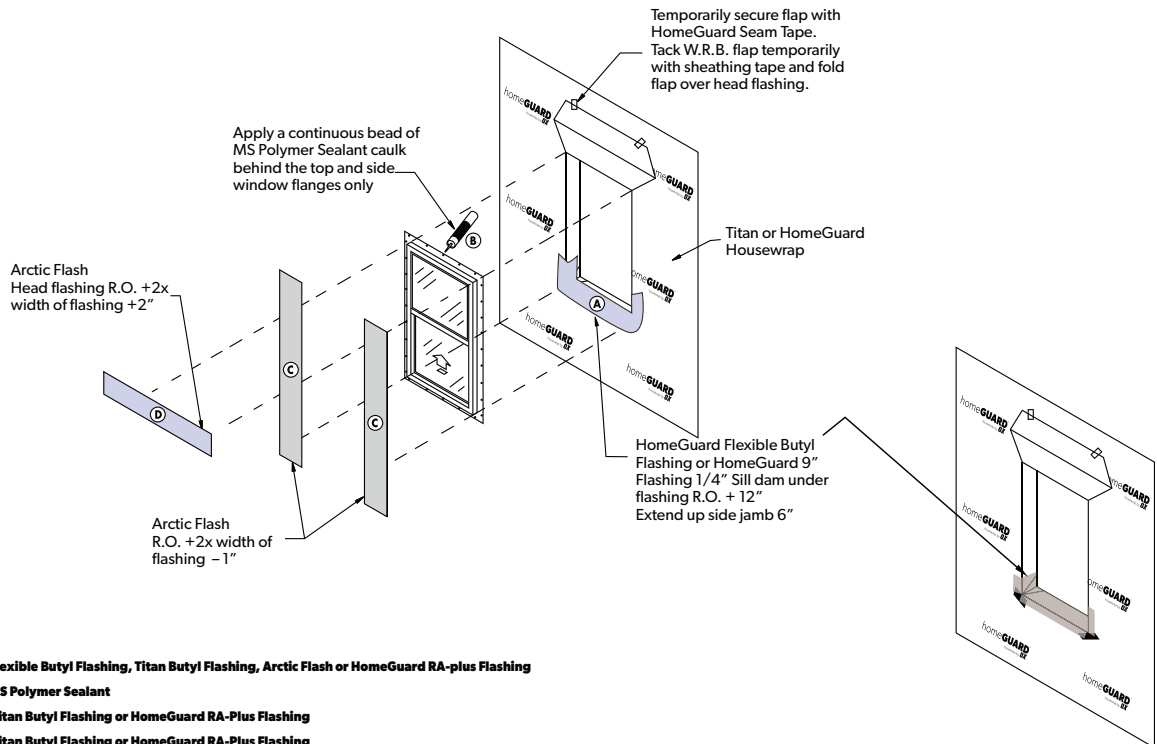

## Technical Data for Titan Butyl® Flashing

Properties	Test Method	Test Results
Facer Material Composition		White, high molecular weight film
UV Exposure Rating	Testing after aging	6 months
Cold Temperature Flexibiity	ASTM C772-74	Pass
Self -Seal	ASTM D1970 Section 7.9	Pass
Sealant Compatibility	AAMA 713-08	Pass
Plasticizer Migration	ASTM C772-74	No bleed or contact stain
Moisture Vapor Permeability	ASTM E96	<1 perm
Certifications	AAMA 711-07	Meets or exceeds requirements