




OX Engineered Products
22260 Haggerty Road Suite 365
Northville, MI 48167
p. 1.800.345.8881
f. 248.289.9955
oxep.com



HomeGuard RA-plus® **FLASHING**

by **OX**

HomeGuard RA-plus® Flashing is a high performance self-adhering rubberized asphalt flashing for windows, window sills, doors and penetrations in commercial and residential construction. HomeGuard RA-plus® Flashing is available in 4", 6", 9", 12", and 18"x75' rolls.

Printed in the USA 

Installation

Easy Installation;
peel and stick

Applications

Can be applied in
temps down to
35° F

Sizes

Available in 4", 6", 9",
12" and 18" by 75' rolls


Warranty

15 year limited
warranty

Attributes

- Peel-n-stick –easy installation
- Application temperature 35°F – 180 °F
- 6 month UV exposure
- High tack –can be used with or without primer
- Excellent air & moisture barrier properties
- Compatible with sealants & caulking
- Self-seals around properly installed fasteners
- 15 Year Limited Warranty
- Made in the USA

Installation

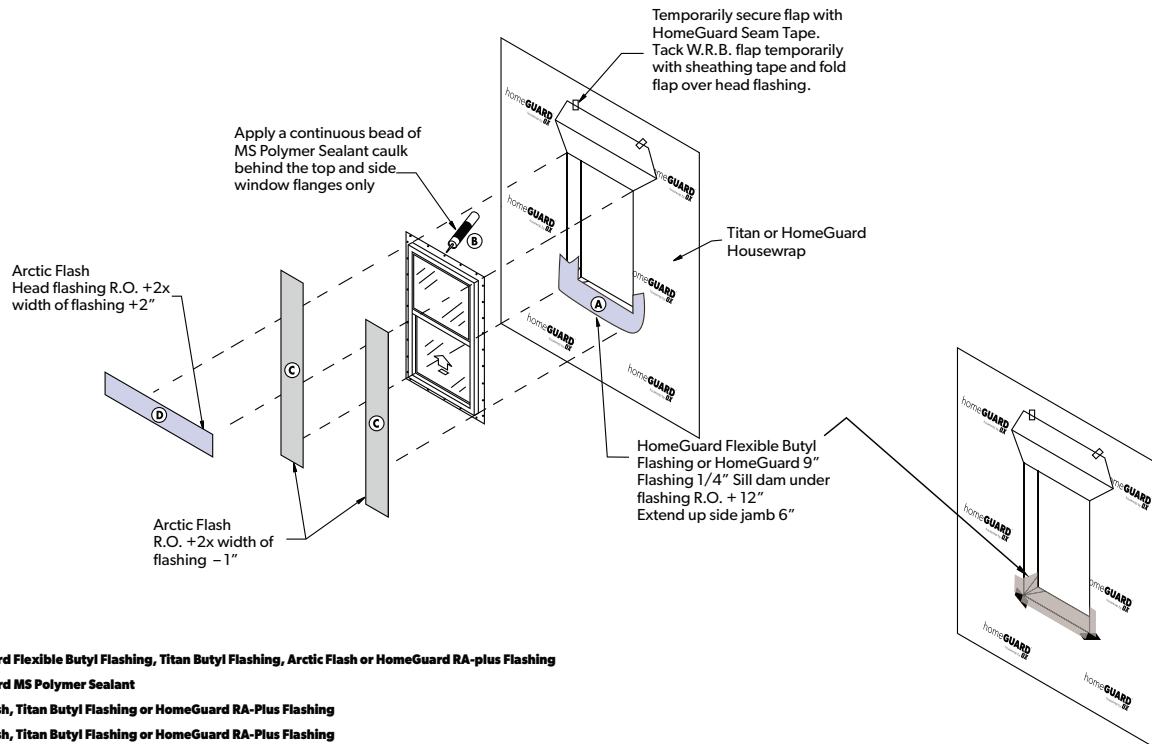

Technical Data for RA-plus Rubberized Asphalt Flashing

Properties	Test Method	Test Results
Facer Material Composition		White, High Molecular Weight Film
UV Exposure Rating	Testing After Aging	6 months
Cold Temperature Flexibility	ASTM C772-74	Pass
Self-Seal	ASTM D 1970 Section 7.9	Pass
Sealant Compatibility	AAMA 713-08	Pass
Plasticizer Migration	ASTM C772-74	No Bleed or Contact Stain
Moisture Vapor Permeability	ASTM E96	<1 perm
Certifications	AAMA 711-07	Meets or exceeds requirements