




HomeGuard[®]

Arctic-Flash

Synthetic Flashing

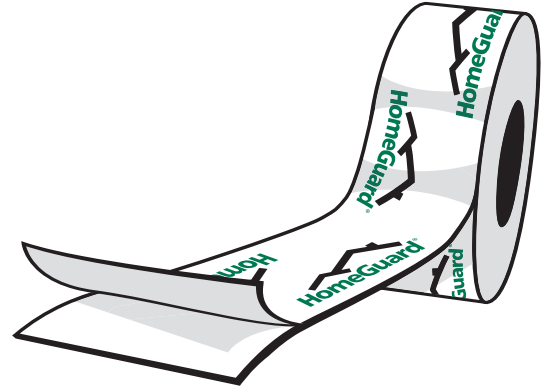


HomeGuard Arctic-Flash is a high tack, high performance self-adhered window and door flashing tape designed with a wide application temperature range from -20°F to extreme heat without requiring primer or mechanical fasteners. Available in 3", 4", 6" and 9" x 75' rolls.

- Peel-n-stick – easy installation
- Can be applied down to -20°F
- 6 month UV exposure
- High tack – no primer necessary
- Excellent air & moisture barrier properties
- Compatible with sealants & caulking
- Self-seals around properly installed fasteners
- No VOCs, HFCCs, or CFCs
- 15 Year Limited Warranty
- Made in the USA

Technical Data for HomeGuard[®] Arctic-Flash Synthetic Flashing

Properties	Test Method	Test Results
Facer Material Composition		White, High Molecular Weight Film
UV Exposure Rating	Testing After Aging	6 Months
Cold Temperature Flexibility	ASTM C772-74	Pass
Self-Seal	ASTM D1970 Section 7.9	Pass
Sealant Compatibility	AAMA 713-08	Pass
Plasticizer Migration	ASTM C772-74	No Bleed or Contact Stain
Moisture Vapor Permeability	ASTM E96	< 1 perm
Certifications	AAMA 711-07	Meets or exceeds requirements

Installation

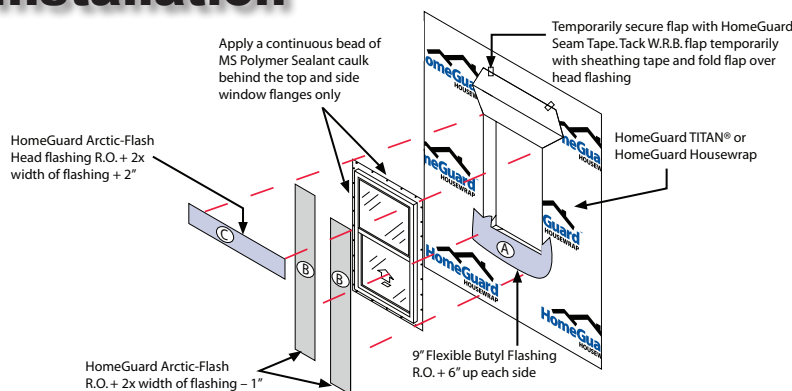

5430 Shawland Road • Jacksonville, FL 32254
 Office: 904.240.1382 • Fax: 866.337.4016
www.HomeGuardBuildingProducts.com