




OX Engineered Products  
22260 Haggerty Road Suite 365  
Northville, MI 48167  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com

# seam**TAPE**

sheathing tape by **OX**

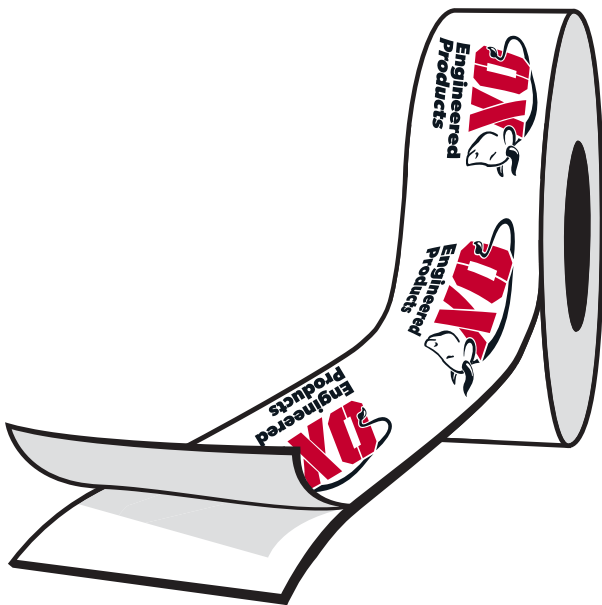

Ox SeamTape® is hand tearable seam tape, coated with a highly aggressive acrylic pressure sensitive adhesive (PSA) designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. Ox SeamTape® exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials. Ox SeamTape® is the highest performing, highest value product on the market today. Available in clear and 2 7/8" x 165'

Printed in the USA 

---

## Usage

For use with HomeGuard HouseWrap, Titan Drainage Wrap, Ox products and other leading housewrap brands

## Application

Installs and performs well over wide temperature ranges


## Available

-Clear  
-2 7/8" x 165'

## Attributes

- For use with OX-IS<sup>®</sup>, Thermo-Ply<sup>®</sup> and other Ox products
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape on polyethylene film
- Performs well as a seam tape on extruded foam products such as Foamular<sup>®</sup>

## Installation

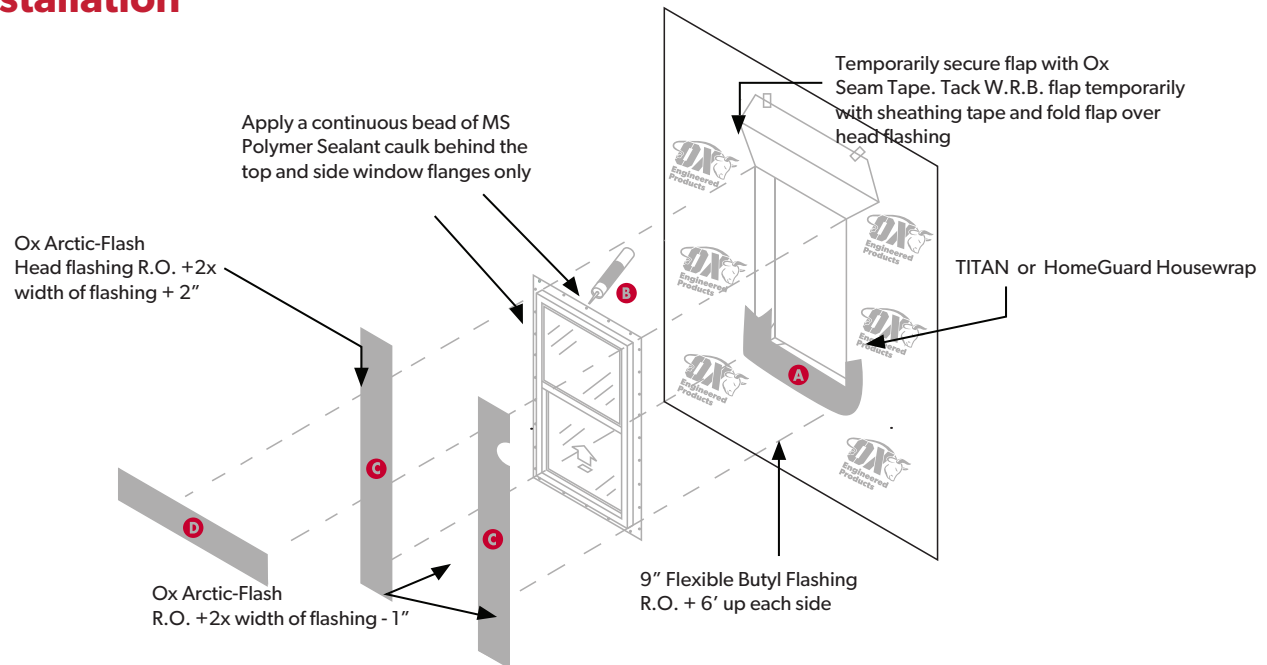

## Technical Data for Ox Seam Tape

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.54	0.65 mm	PSTC-133
Peel Adhesion			
to stainless steel	60 oz/in	16.7 N/25 mm	PSTC-101
to polyethylene	30oz/in	8.3 N/25 mm	PSTC-101
to Tyvek	48 oz/in	13.3 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	20 lb/in.	90.4 N/25 mm	PSTC-131
Elongation	130%	130%	PSTC-131
WVTR	0.061 perms		ASTM E96
Service Temperature	-40 to 248° F	-40 to 120° C	