



OX Engineered Products
22260 Haggerty Road Suite 365
Northville, MI 48167
p. 1.800.345.8881
f. 248.289.9955
oxep.com



seam**TAPE**

sheathing tape by **OX**

Ox SeamTape® is hand tearable seam tape, coated with a highly aggressive acrylic pressure sensitive adhesive (PSA) designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. Ox SeamTape® exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials. Ox SeamTape® is the highest performing, highest value product on the market today. Available in clear and 2 7/8" x 165'

Printed in the USA 

Usage

For use with HomeGuard HouseWrap, Titan Drainage Wrap, Ox products and other leading housewrap brands

Application

Installs and performs well over wide temperature ranges. Ox Seam Tape must be used with OX-IS™ and Thermo-Ply® in order to meet the 30-year limited system warranty requirements


Available

Clear
2 7/8" x 165'

Attributes

- For use with OX-IS™, Thermo-Ply® and other Ox products
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape on polyethylene film
- Performs well as a seam tape on extruded foam products such as Foamular®

Installation

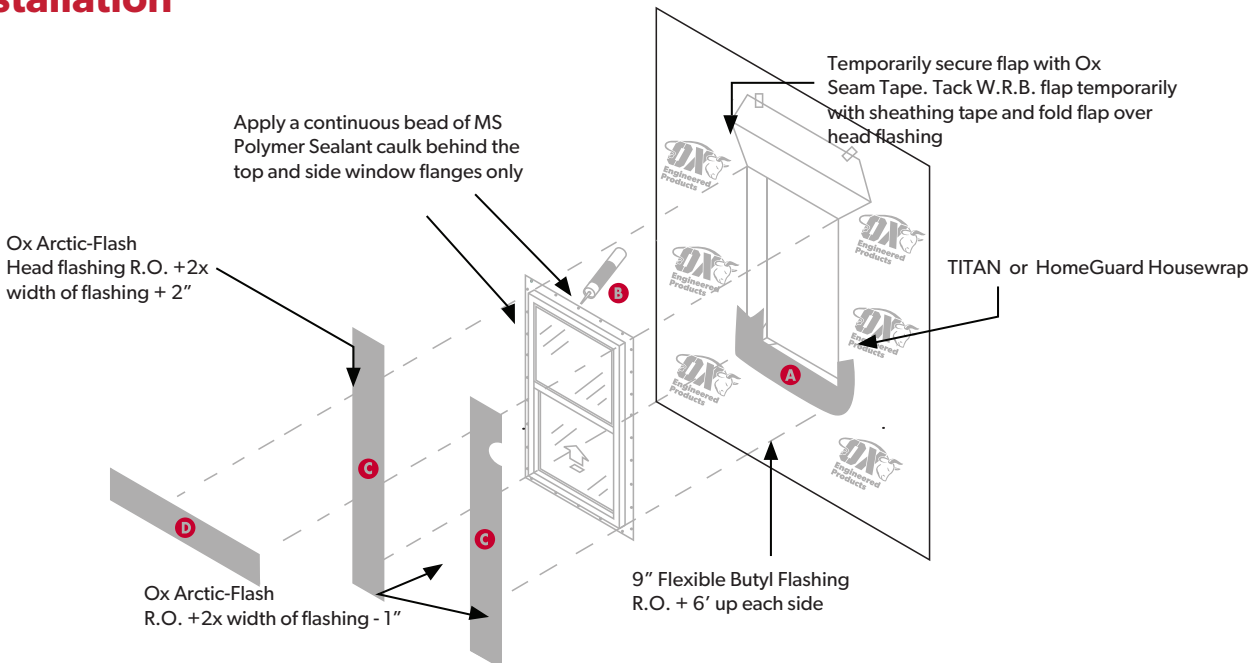

Technical Data for Ox Seam Tape

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.54	0.65 mm	PSTC-133
Peel Adhesion			
to stainless steel	60 oz/in	16.7 N/25 mm	PSTC-101
to polyethylene	30oz/in	8.3 N/25 mm	PSTC-101
to Tyvek	48 oz/in	13.3 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	20 lb/in.	90.4 N/25 mm	PSTC-131
Elongation	130%	130%	PSTC-131
WVTR	0.061 perms		ASTM E96
Service Temperature	-40 to 248° F	-40 to 120° C	