




OX Engineered Products
22260 Haggerty Road Suite 365
Northville, MI 48167
p. 1.800.345.8881
f. 248.289.9955
oxep.com

seam**TAPE**

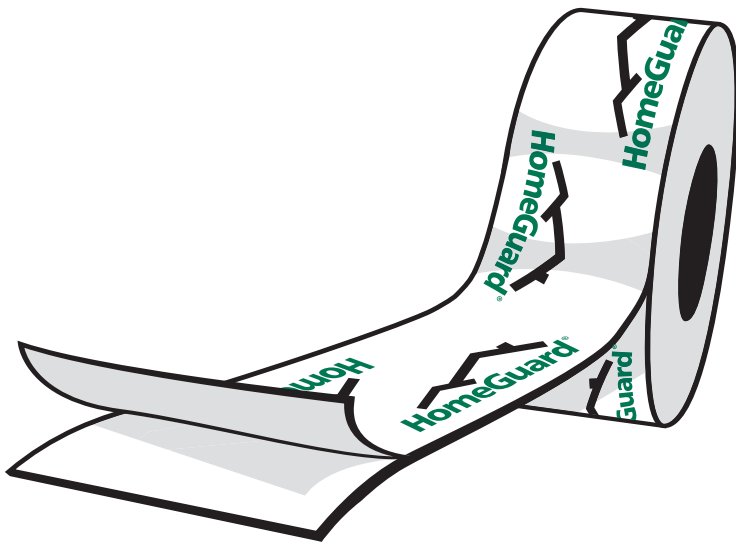

HomeGuard® SeamTape® is a polypropylene sheathing tape coated with an aggressive acrylic pressure sensitive adhesive (PSA) designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. HomeGuard® SeamTape® is the highest performing, highest value product on the market today. Available in white and 1 7/8" x165'

Printed in the USA 

Usage

For use with HomeGuard HouseWrap, Titan Drainage Wrap, Ox products and other leading housewrap brands

Application

Installs and performs well over wide temperature ranges.


Available

White
1 7/8" x 165'

Attributes

- High performance sheathing tape installs and performs well over wide temperature ranges.
- Excellent vapor barrier tape on polyethylene film
- Performs well as a seam tape on extruded foam products such as Styrofoam® and Foamular®
- Applies to all major housewraps including Tyvek® and Typar®
- Great for use as a sealing tape on DensGlass Gold® and other sheathing brands.

Installation

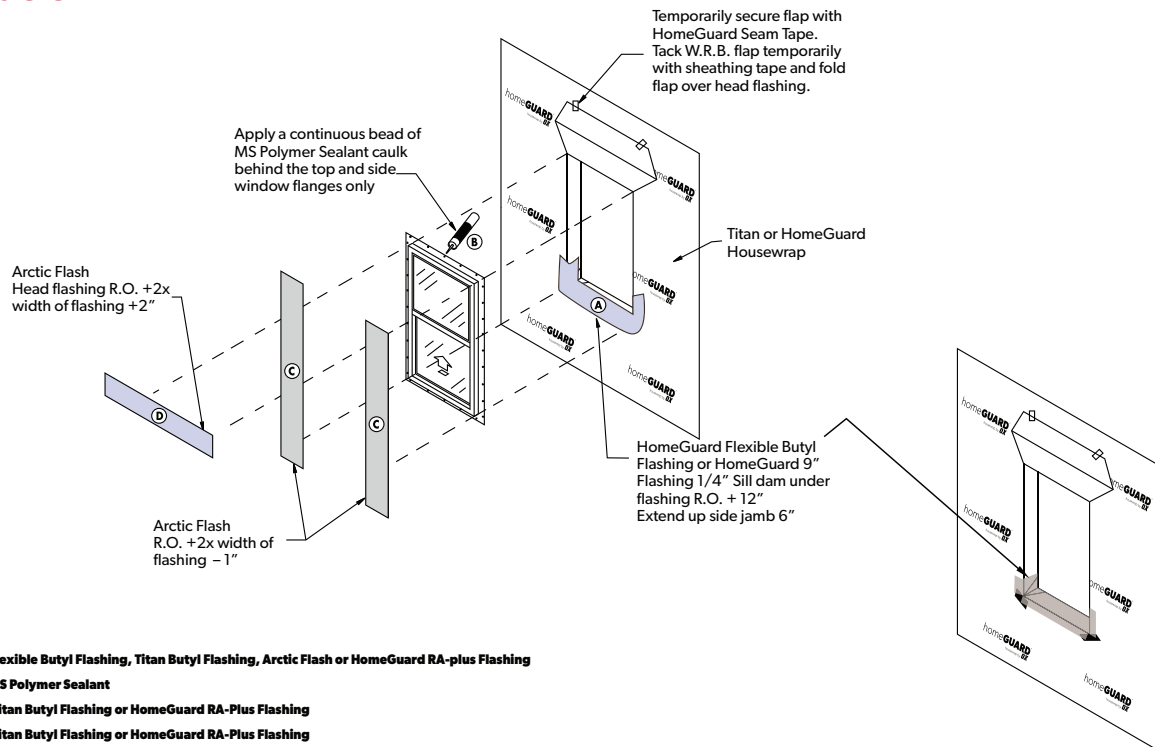

- A. HomeGuard Flexible Butyl Flashing, Titan Butyl Flashing, Arctic Flash or HomeGuard RA-plus Flashing**
- B. HomeGuard MS Polymer Sealant**
- C. Arctic-Flash, Titan Butyl Flashing or HomeGuard RA-Plus Flashing**
- D. Arctic-Flash, Titan Butyl Flashing or HomeGuard RA-Plus Flashing**

Technical Data for HomeGuard Seam Tape

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.0 mils	0.08 mm	PSTC-133
Peel Adhesion			
to stainless steel	45 oz/in	12.5 N/25 mm	PSTC-101
to polyethylene	16 oz/in	4.5 N/25 mm	PSTC-101
to Tyvek	25 oz/in	6.9 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	20 lb/in.	90.4 N/25 mm	PSTC-131
Elongation	130%	130%	PSTC-131
WVTR	0.061 perms		ASTM E96
Application Temperature	-4° to 105° F	-20° to 41° C	