



OX Engineered Products  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com



## seamTAP<sup>®</sup>E

sheathing tape by **OX**

Ox SeamTape<sup>®</sup> is hand tearable seam tape, coated with a highly aggressive acrylic pressure sensitive adhesive (PSA) designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. Ox SeamTape<sup>®</sup> exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials. Ox SeamTape<sup>®</sup> is the highest performing, highest value product on the market today. Available in clear and 2 7/8" x 165'

---

### Usage

For use with OX-IS<sup>™</sup>, Thermo-Ply<sup>®</sup>, HomeGuard<sup>®</sup> HouseWrap, Titan Drainage Wrap<sup>®</sup>, and other Ox building products.

### Application

Installs and performs well over wide temperature ranges. Ox Seam Tape must be used with OX-IS<sup>™</sup> and Thermo-Ply<sup>®</sup> in order to meet the 30-year limited system warranty requirements

### Available


Clear  
2 7/8" x 165'

## Attributes


- For use with OX-IS™, Thermo-Ply®, ISO RED CI®, and other Ox building products.
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape on polyethylene film
- Performs well as a seam tape for all major housewraps and extruded foam products.

## Installation

### Panel Taping

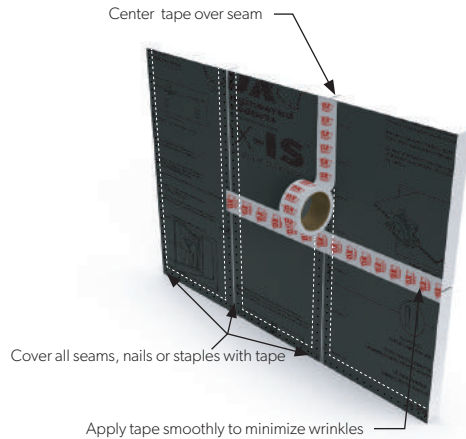

### Shingle fashion technique

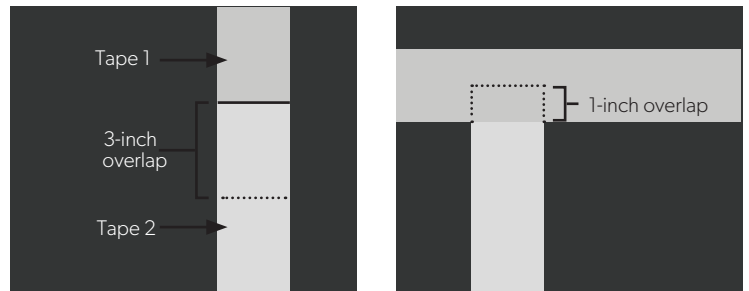

## Technical Data for Ox Seam Tape®

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.54	0.65 mm	PSTC-133
Peel Adhesion			
to stainless steel	60 oz/in	16.7 N/25 mm	PSTC-101
to polyethylene	30oz/in	8.3 N/25 mm	PSTC-101
to Tyvek	48 oz/in	13.3 N/25 mm	PSTC-101
Shear Adhesion	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength	20 lb/in.	90.4 N/25 mm	PSTC-131
Elongation	130%	130%	PSTC-131
WVTR	0.061 perms		ASTM E96
Application Temperature	-4° to 105° F	-20° to 41° C	