





OX Engineered Products  
22260 Haggerty Road Suite 365  
Northville, MI 48167  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com

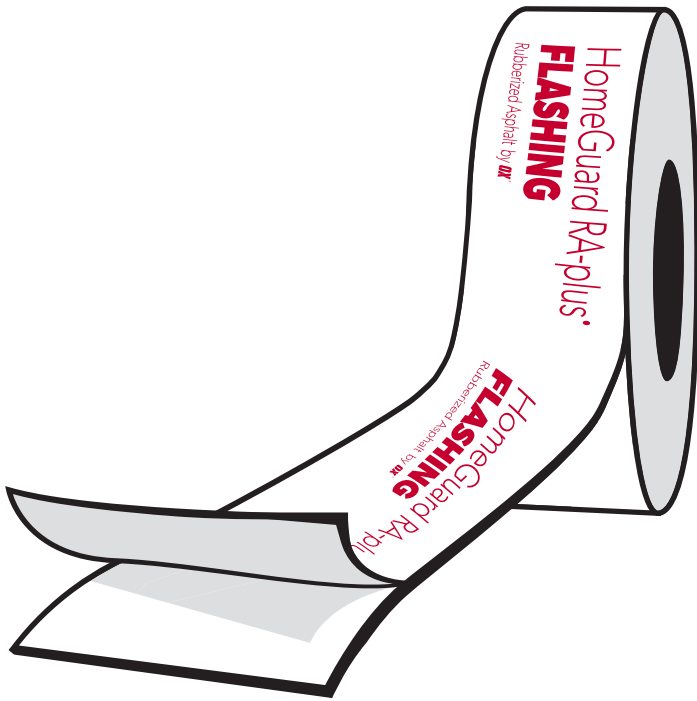

## HomeGuard RA-plus® **FLASHING**

Rubberized Asphalt by **OX**

HomeGuard RA-plus® Flashing is a high performance self-adhering rubberized asphalt flashing for windows, window sills, doors and penetrations in commercial and residential construction. HomeGuard RA-plus® Flashing is available in 4", 6", 9", 12", and 18"x75' rolls.

Printed in the USA 

---

### **Installation**

Easy Installation;  
peel and stick

### **Applications**

Can be applied in  
temps down to  
35° F

### **Sizes**

Available in 4", 6", 9",  
12" and 18" by 75' rolls


### **Warranty**

15 year limited  
warranty

## Attributes

- Peel-n-stick –easy installation
- Application temperature 35°F – 180 °F
- 6 month UV exposure
- High tack –can be used with or without primer
- Excellent air & moisture barrier properties
- Compatible with sealants & caulking
- Self-seals around properly installed fasteners
- 15 Year Limited Warranty
- Made in the USA

## Installation

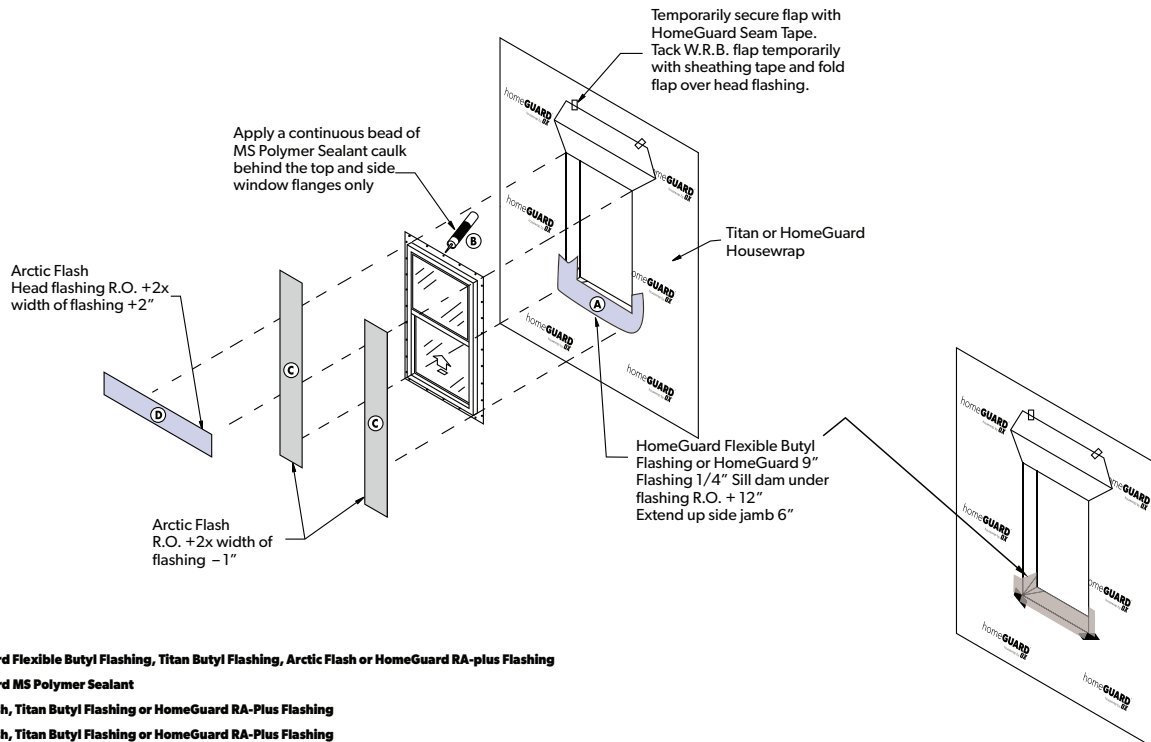

## Technical Data for RA-plus Rubberized Asphalt Flashing

Properties	Test Method	Test Results
Facer Material Composition		White, High Molecular Weight Film
UV Exposure Rating	Testing After Aging	6 months
Cold Temperature Flexibility	ASTM C772-74	Pass
Self-Seal	ASTM D 1970 Section 7.9	Pass
Sealant Compatibility	AAMA 713-08	Pass
Plasticizer Migration	ASTM C772-74	No Bleed or Contact Stain
Moisture Vapor Permeability	ASTM E96	<1 perm
Certifications	AAMA 711-07	Meets or exceeds requirements