



Ox Engineered Products
p. 1.800.345.8881
f. 248.289.9955
oxep.com

ISO RED[®] GF SEAM TAPE by OX

Ox ISO RED[®]GF Seam Tape is a foil faced seam tape, designed for use as a closure system and vapor seal on exterior sheathing products like Ox ISO RED[®]GF. Ox ISO RED[®]GF Seam Tape exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials.

Available in 2 7/8" x 150'



Usage

For use with Ox
ISO RED[®] MAX
GF

Application

Installs and performs well
over wide temperature ranges.
Ox ISO RED[®]GF Seam Tape
must be used with Ox ISO RED[®]
MAX GF in order to meet the 30-
year limited system warranty
requirements.

Available


Foil Faced
2 7/8" x 150'

Applications



- For use with ISO RED MAX GF, and other Ox building products.
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape.
- Performs well as a seam tape for all major housewraps and extruded foam products.
- AST E84 (0 smoke, 5 flame)

Installation

Panel Taping

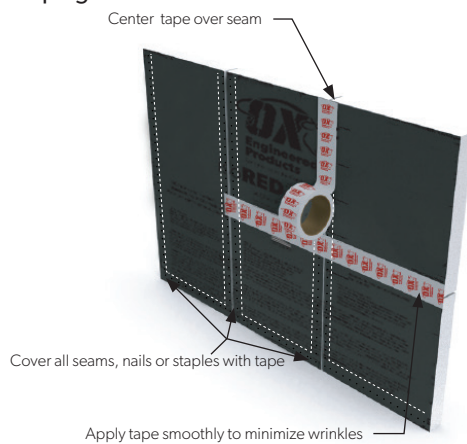

Shingle fashion technique

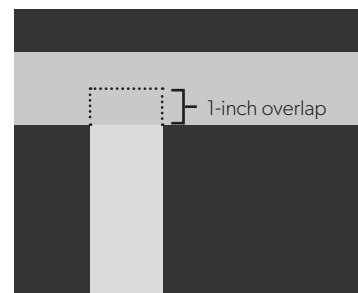

Technical Data for Ox ISO RED[®]GF Seam Tape

Properties	Typical Value	Typical Value (Metric)	Test Method
Product Thickness	3.35 mils	0.65	PSTC-133
Peel Adhesion	≥ 70 oz/in	16.7 N/25 mm	PSTC-101
Tensile Strength	10.2 lb/in.	90.4 N/25 mm	PSTC-131
Application temperature	-4° to 104° F	-20° to 48° C	