




Ox Engineered Products
p. 1.800.345.8881
f. 248.289.9955
oxep.com

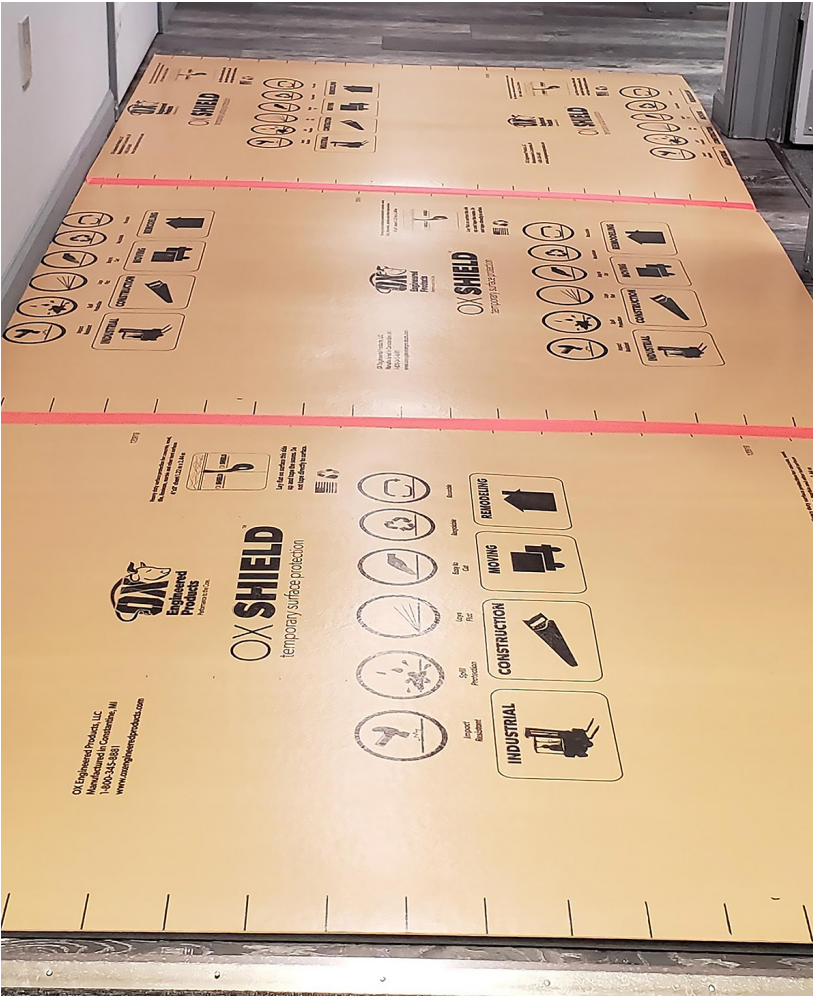

OX Shield SEAM TAPE by OX

Ox Shield Tape is a polyethylene tape made up of polyethylene laminated synthetic fabric backing. Ox Shield Tape is designed to work with Ox Shield™ Surface Protection by providing excellent adhesion while leaving little to no adhesive residue on the Ox Shield™ panel. This makes it the ideal product for protecting new or existing concrete, wood, tile, stone, linoleum, epoxy and most other surfaces on the jobsite.

Usage

For use with OX Shield™
Surface Protection

Applications:

Masking of rougher surfaces,
temporary holding of interior
construction materials, and
temporary seam tape for Ox
Shield Surface Protection
Panels

Available:

Red 2 3/8" x 165'

Attributes

- For use with Ox Shield Surface Protection
- Low residue adhesive formula
- Hand Tearable
- Low profile so contours to various surfaces

Storage & Usage Conditions

Store tape in its original packaging away from direct sunlight and in a cool and dry area. Tape works best when applied to a surface that is clean, dry and free of grease, oil or other contaminants.



Product Construction

Backing	PE laminated synthetic backing
Adhesive	Synthetic Resin PSA

Technical Data

Total Thickness	4 mil
Tensile	17 lbs./in.
Adhesion	25 oz./in.
Application temperature	10° F (12°C) - 95° F (35°C)
Service temperature	-40°F (-40°C) - 176° F (80°C)