



Ox Engineered Products
p. 1.800.345.8881
f. 248.289.9955
oxep.com



TITAN[®] SEAM TAPE

by **OX**

Titan[®] Seam Tape consists of a polyester film coated with a high-performance acrylic adhesive on one side. This product offers an excellent balance of high tack and high peel properties. Titan[®] Seam Tape is commonly used in a variety of sheathing and construction applications.

Usage

For use with
Titan[®] Drainage
Wrap.

Application

Installs and performs well in low temperatures with excellent adhesion and quick sticking. Titan[®] Seam Tape must be used with Titan[®] Drainage wrap in order to meet the 15-year limited system warranty requirements.


Available

2.362" x 165'

Applications

- For use with Titan[®] Drainage Wrap
- High performance sheathing tape installs and performs well in low temperatures.
- Moisture, solvent, and UV resistant
- Excellent adhesion and quick sticking
- Sheathing applications
- Splicing non silicone surfaces
- Construction Applications

Installation

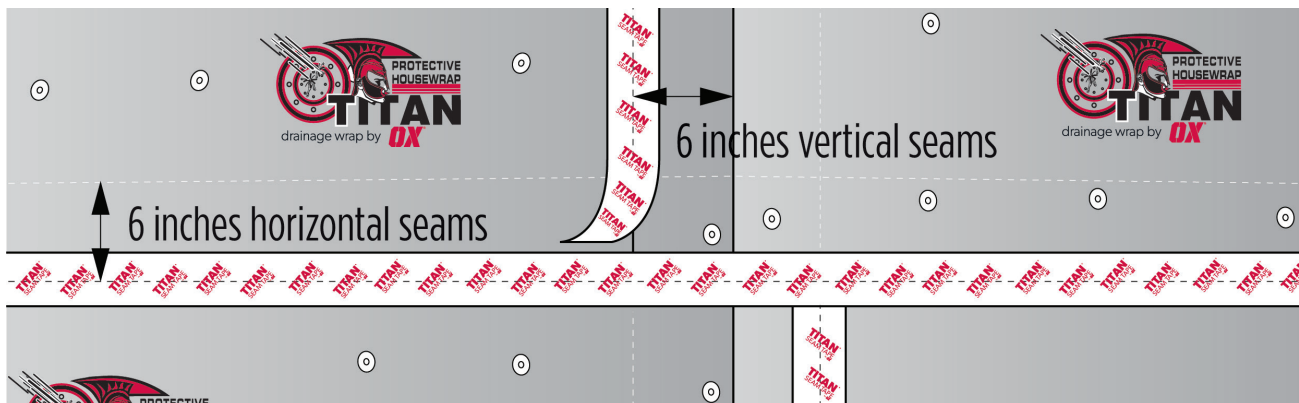

Technical Data for Titan[®] Seam Tape

Properties	Typical Value	Typical Value (Metric)	Test Method
Product Thickness	3.70 mils	0.0939 mm	PSTC-133
Backing Thickness	1.50 mils	0.0381 mm	PSTC-133
Peel Adhesion	85 oz/in	23.61 N/25.4 mm	PSTC-101
Elongation		105%	
Tensile Strength	40 lb/in.	7 N/25.4 mm	
Temperature Range	+0°F to +230° F	-17.50°C to +110° C	