



OX Engineered Products  
22260 Haggerty Road Suite 365  
Northville, MI 48167  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com

# Ox Butyl Flashing **TAPE** by **OX**

Ox Butyl® Flashing is a high tack, high performance self-adhered window and door flashing tape.  
Available in 4", 6", 9" and 12" x 75' rolls.



---

## **Uses**

Ideal for flashing windows and door openings

## **Installation**

Peel-n-stick backer for easy installation

## **Applications**

Can be applied in temps as low as 0° F.


## **Ease of Use**

Self seals around fasteners

## Attributes

- Peel-n-stick – Easy installation
- Application temperature 0° F – 180° F
- Operating Temperature -10° - 200° F
- High tack – no primer necessary
- Excellent air & moisture barrier properties
- Compatible with sealants and caulking
- Self-seals around properly installed fasteners
- No VOCs, HFCCs, or CFCs
- 6 month UV exposure
- Can be used in all Ox Product 30-Year System warranties
- Made in the USA

## Installation

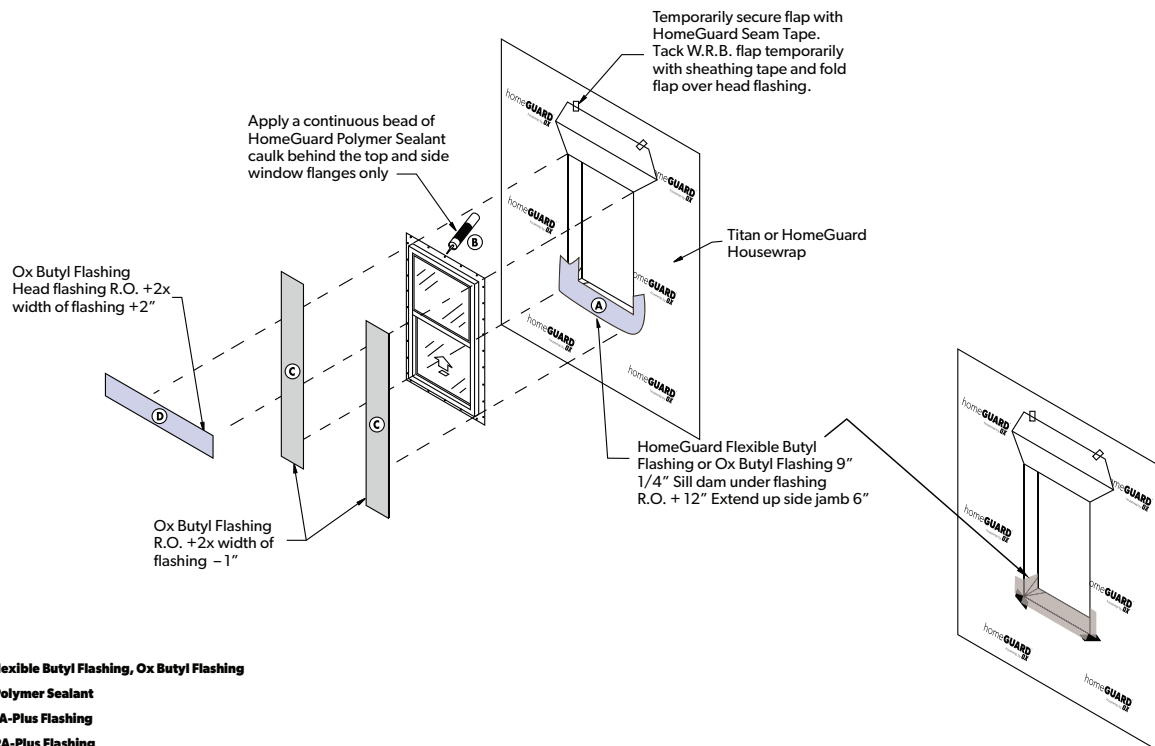

## Technical Data for Ox Butyl® Flashing

Properties	Test Method	Test Results
Facer Material Composition		White, high molecular weight film, woven
UV Exposure Rating	Testing after aging	6 months
Cold Temperature Flexibility	ASTM C765	Pass
Nail Sealability	ASTM D1970 Section 7.9 MOD	Pass
Permeance	ASTM F1249	<1 perm
Certifications	AAMA 711-20	Meets or exceeds requirements