



Performance to the Core

OX Engineered Products  
p. 1.800.345.8881  
f. 248.289.9955  
oxep.com



**seamTAPE<sup>®</sup>**  
COMMERCIAL sheathing tape  
by **OX**

Ox Commercial SeamTape<sup>®</sup> is a foil faced seam tape, designed for use as a closure system and vapor seal on exterior sheathing products like Ox Strong-R<sup>®</sup> and ISO Red MAX<sup>®</sup> products. Ox Commercial SeamTape<sup>®</sup> exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials. Available in 2 7/8" x 150'

### Usage

For use with Strong-R,<sup>®</sup> and ISO RED MAX<sup>®</sup> products.

### Application

Installs and performs well over wide temperature ranges. Ox Commercial Seam Tape<sup>®</sup> must be used with Strong-R<sup>®</sup> or ISO RED MAX<sup>®</sup> in order to meet the 30-year limited system warranty requirements

### Available


Foil Faced  
2 7/8" x 150'

## Attributes


- For use with Strong-R®, ISO RED MAX®, and other Ox building products.
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape.
- Performs well as a seam tape for all major housewraps and extruded foam products.
- AST E84 (0 smoke, 5 flame)

## Installation

### Panel Taping

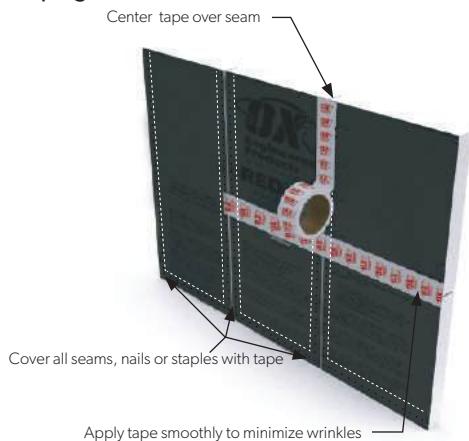

### Shingle fashion technique

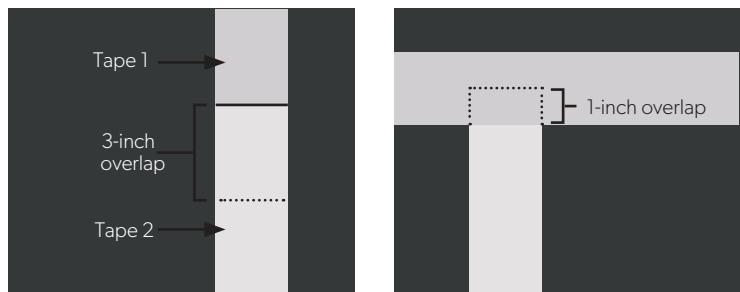

## Technical Data for Ox Commercial Seam Tape®

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.35 mils	0.65 mm	PSTC-133
Peel Adhesion	≥70 oz/in	16.7 N/25 mm	PSTC-101
Tensile Strength	10.2 lb/in.	90.4 N/25 mm	PSTC-131
Application Temperature	-4° to 104° F	-20° to 48° C	