



Performance to the Core

OX Engineered Products
p. 1.800.345.8881
f. 248.289.9955
oxep.com



seamTAPE sheathing tape by **OX**

Ox SeamTape® is hand tearable seam tape, coated with a highly aggressive acrylic pressure sensitive adhesive (PSA) designed for use as a closure system and vapor seal on all interior and exterior sheathing materials. Ox SeamTape® exceeds most building code requirements and can be used for new construction as well as repair on all vapor barrier materials. Ox SeamTape® is the highest performing, highest value product on the market today. Available in clear and 2 7/8" x 165'

Usage

For use with OX-IS™ Thermo-Ply®, HomeGuard® HouseWrap, Titan Drainage Wrap®, and other Ox building products.

Application

Installs and performs well over wide temperature ranges. Ox Seam Tape must be used with OX-IS™ and Thermo-Ply® in order to meet the 30-year limited system warranty requirements

Available


Clear
2 7/8" x 165'

Attributes


- For use with OX-IS™, Thermo-Ply®, ISO RED CI®, and other Ox building products.
- High performance sheathing tape installs and performs well over a wide temperature range.
- Excellent vapor barrier tape on polyethylene film
- Performs well as a seam tape for all major housewraps and extruded foam products.

Installation

Panel Taping

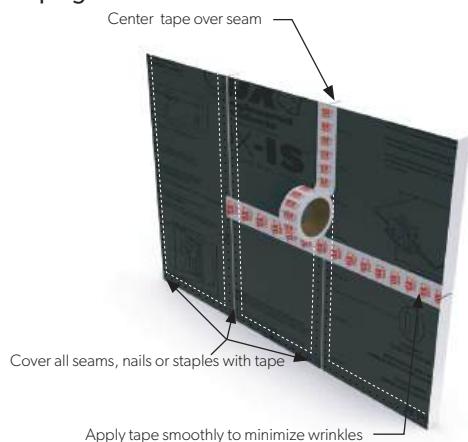

Shingle fashion technique

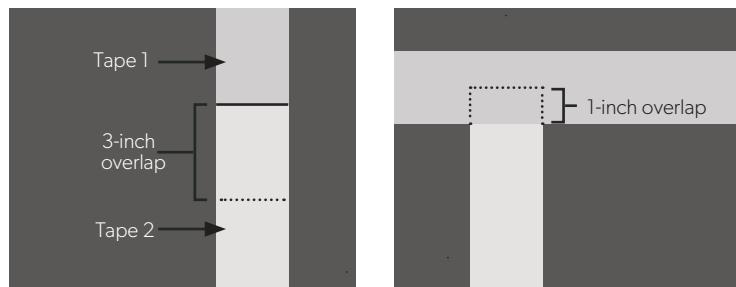

Technical Data for Ox Seam Tape®

Properties	Typical Value	Typical Value (Metric)	Test Method
Product thickness	3.54 mils	0.65 mm	PSTC-133
Peel Adhesion			
to stainless steel	60 oz/in	16.7 N/25 mm	PSTC-101
to polyethylene	30oz/in	8.3 N/25 mm	PSTC-101
to Tyvek	48 oz/in	13.3 N/25 mm	PSTC-101
Shear Adhesion			
	>24 hrs @ 2.2 psi	>24 hrs @ 15.2 kPa	PSTC-107
Tensile Strength			
	20 lb/in.	90.4 N/25 mm	PSTC-131
Elongation			
	130%	130%	PSTC-131
WVTR			
	0.061 perms		ASTM E96
Application Temperature			
	-4° to 105° F	-20° to 41° C	